

PENTEK® UV SERIES ULTRAVIOLET SYSTEMS



All UV Series Systems are constructed with a durable polypropylene housing; a quartz sleeve to protect the lamp and provide maximum UV transmittance; a UL-listed, voltage regulated control module, mounting bracket and hardware.

UV-120 and UVBB Models are equipped with a stainless steel insert sleeve to provide increased durability.

UVS-110 and UV-110 Systems are equipped with a CBU-10 carbon block cartridge to provide the maximum UV transmittance through the water by reducing turbidity.

UV Series Ultraviolet Systems are available in two sizes: 120 volt, 60 hertz; and 220/240 volt, 50 hertz. System flow rate range from 1-15 gpm (3.8 - 57 Lpm).

FEATURES/BENEFITS

High-intensity UV output

Positive alternative to environmentally harmful chemicals

Available in three different sizes and two different voltages

Produces a dose of UV light (16,000 microwatt-sec per square centimeter) at a wavelength of 254 nanometers

SPECIFICATIONS

Housing – Polypropylene

Cap – Polypropylene

UV Sleeve – Quartz

O-Rings – Buna-N®

Maximum Temperature –
40-100°F (4.4-37.8°C)


Reaction Chamber – Stainless steel
(20" models only)

SPECIFICATIONS AND PERFORMANCE

MODEL	MAXIMUM DIMENSIONS	VOLTAGE	HERTZ	RECOMMENDED FLOW RATES	MAXIMUM OPERATING PRESSURE
UVS-110-2**	5-1/2" x 15-1/2" (140 mm x 394 mm)	220	50	1 gpm (3.8 Lpm)	65 psi (4.5 bar)
UV-110-1*	5-1/2" x 15-1/2" (140 mm x 394 mm)	120	60	2 gpm (7.6 Lpm)	65 psi (4.5 bar)
UV-110-2*	5-1/2" x 15-1/2" (140 mm x 394 mm)	220	50	2 gpm (7.6 Lpm)	65 psi (4.5 bar)
UV-120-1	5-1/2" x 25-1/2" (140 mm x 648 mm)	120	60	8 gpm (30.3 Lpm)	65 psi (4.5 bar)
UV-120-2	5-1/2" x 25-1/2" (140 mm x 648 mm)	220	50	8 gpm (30.3 Lpm)	65 psi (4.5 bar)
UVBB-120-1	7" x 29" (178 mm x 737 mm)	120	60	15 gpm (56.8 Lpm)	65 psi (4.5 bar)
UVBB-120-2	7" x 29" (178 mm x 737 mm)	220	50	15 gpm (56.8 Lpm)	65 psi (4.5 bar)

* Supplied with a carbon block filter cartridge which reduces sediment, bad taste and odor.

† For export sale only.

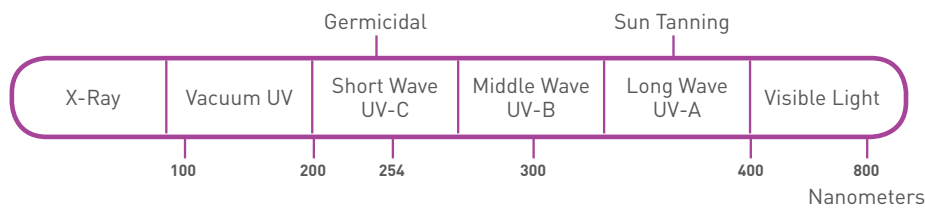

Minimum Dose:* 16 mJ/cm² (16,000 microwatt-sec per cm²)

Models UVS-110-1, UVS-110-2, UV-110-1 and UV-110-2 incorporate a carbon block cartridge (CBU-10) that surrounds the quartz tube. This cartridge provides prefiltration that assures maximum transmittance of UV light through the water.

NOTE: Carbon block prefilters or other fine filtration can be plumbed in separately to provide this function for models UV-120 and UVBB-120.

*Determined by:

LAMP INTENSITY (microwatts) X TIME OF EXPOSURE IN REACTOR CHAMBER (sec)

÷ SURFACE AREA OF REACTOR CHAMBER (cm²) = microwatt • sec/cm² = mJ/cm²/1000a



FILTRATION & PROCESS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209

P: 262.238.4400 | F: 262.518.4404 | WWW.PENTAIRAQUA.COM | CUSTOMER CARE: 800.279.9404

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

Pentair is an equal opportunity employer.

310091 REV C DE13 © 2012 Pentair Residential Filtration, LLC. All Rights Reserved.